



# EnGenius Cloud Access Point ECW230

Optimal Performance, Enterprise Features & Cloud Management

## Product Highlights

EnGenius Cloud Managed ECW230 Wi-Fi 6 (802.11ax) 4x4 Indoor Wireless Access Point features 802.11ax technology, such as OFDMA, MU-MIMO, and spatial reuse, to expand the capabilities of Wi-Fi. The low-profile AP provides high-density support & maximum speeds of 1,148 Mbps (2.4 GHz frequency) and 2,400 Mbps (5 GHz frequency).

## Features & Benefits

- Dual concurrent 802.11ax architecture & backward-compatible with 11ac/a/b/g/n client devices; 4x4 antenna
- Supports up to 2,400 Mbps in 5-GHz frequency band & 1,148 Mbps in 2.4-GHz frequency band
- 2.5 GbE realizes greater throughput and supports 802.3at & 48V PoE input for flexible installation up-to 100 meters (328 feet)
- Uplink and downlink of OFDMA improves transmission to APs and client devices
- Target wake time for power-saving of client & IoT devices



## Standards

IEEE 802.11ax on 2.4 GHz

IEEE 802.11ax on 5 GHz

Backward compatible with 802.11a/b/g/n/ac

## Antenna

4 x 2.4 GHz: 4 dBi

4 x 5 GHz: 5 dBi

Integrated Omni-Directional Antenna

## Physical Interface

1 x 10/100/1000/2500 N-BASE-T, RJ-45 Ethernet Port

1 x DC Jack

1 x Reset Button

## LED Indicators

1 x Power

1 x LAN

1 x 2.4 GHz

1 x 5 GHz

## Power Source

Power-over-Ethernet: 802.3at Input

12VDC /2A

## Maximum Power Consumption

19.5W

## Wireless & Radio Specifications Operating Frequency

Dual-Radio Concurrent 2.4 GHz & 5 GHz

## Operation Modes

Managed mode: AP and Mesh

## Frequency Radio

2.4 GHz: 2400 MHz ~ 2482 MHz

5 GHz: 5150 MHz ~ 5250 MHz, 5250 MHz ~ 5350 MHz, 5470 MHz ~ 5725 MHz, 5725 MHz ~ 5850 MHz

## Transmit Power

Up to 23 dBm on 2.4 GHz

Up to 23 dBm on 5 GHz

(Maximum power is limited by regulatory domain)

## Tx Beamforming (TxBF)

### Radio Chains/Spatial Stream

4x4:4

### SU-MIMO

Four(4) spatial stream SU-MIMO for 2.4GHz and four(4) spatial stream SU-MIMO for 5GHz up to 3,548 Mbps wireless data rate to a single wireless client device under the both 2.4GHz and 5GHz radio.

### MU-MIMO

Four(4) spatial streams MU-MIMO for up to 2,400 Mbps wireless data rate to transmit to two(2) streams MU-MIMO 11ax capable wireless client devices under 5GHz simultaneously.

Four(4) MU-MIMO for up to 1,148 Mbps wireless data rate to transmit to two(2) streams MUMIMO 11ax capable wireless client devices under 2.4GHz simultaneously.

### Supported Data Rates (Mbps):

802.11ax:

2.4 GHz: 9 to 1,148 (MCS0 to MCS11, NSS = 1 to 4)

5 GHz: 18 to 2,400 (MCS0 to MSC11, NSS = 1 to 4)

802.11b: 1, 2, 5.5, 11

802.11a/g: 6, 9, 12, 18, 36, 48, 54

802.11n: 6.5 to 600 (MCS0 to MCS31)

802.11ac: 6.5 to 1,733 (MCS0 to MCS9, NSS = 1 to 4)

### Supported Radio Technologies

802.11ax: Orthogonal Frequency Division Multiple Access(OFDMA)

802.11ac/a/g/n: Orthogonal Frequency Division Multiple (OFDM)

802.11b: Direct-sequence spread-spectrum (DSSS)

### Channelization

802.11ax supports very high throughput (VHT) –VHT 20/40/80 MHz

802.11ac supports very high throughput (VHT) –VHT 20/40/80 MHz

802.11n supports high throughput (HT) –HT 20/40 MHz

802.11n supports very high throughput under the 2.4GHz radio –VHT40 MHz (256-QAM)

802.11n/ac/ax packet aggregation: A-MPDU, A-SPDU

### Supported Modulation

802.11ax: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM

802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM

802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM

802.11b: BPSK, QPSK, CCK

### Management Multiple BSSID

8 SSIDs on both 2.4GHz and 5GHz bands

### VLAN Tagging

Supports 802.1q SSID-to-VLAN Tagging

Cross-Band VLAN Pass-Through

Management VLAN

### Spanning Tree

Supports 802.1d Spanning Tree Protocol

## QoS (Quality of Service)

Compliant With IEEE 802.11e Standard

WMM

### SNMP

v1, v2c, v3

### MIB

I/II, Private MIB

### Wireless Security

WPA3

WPA2 Enterprise (AES)

WPA2 AES-PSK

Hide SSID in Beacons

MAC Address Filtering, Up to 32 MACs per SSID

Wireless STA (Client) Connected List

SSH Tunnel

Client Isolation

### Environment & Physical Temperature Range

Operating: 32°F~104°F (0 °C~40 °C)

Storage: -40 °F~176 °F (-40 °C~80 °C)

### Humidity (non-condensing)

Operating: 90% or less

Storage: 90% or less

### Dimensions & Weight

Weight: 1.31 lbs. (597 g)

Length: 8.27" (210 mm)

Width: 8.27" (210 mm)

Height: 1.31" (33.2 mm)

### Package Contents

1 – ECW230 Cloud Managed Indoor Access Point

1 – Ceiling Mount Base (9/16" Trail)

1 – Ceiling Mount Base (15/16" Trail)

1 – Ceiling and Wall Mount Screw Kit

1 – Quick Installation Guide

### Packaging

Weight: 1.96 lbs. (891 g)

Length: 9.65" (245 mm)

Width: 9.65" (245 mm)

Height: 3.35" (85 mm)

### Warranty





2 Year

### Certifications


CE

FCC

IC

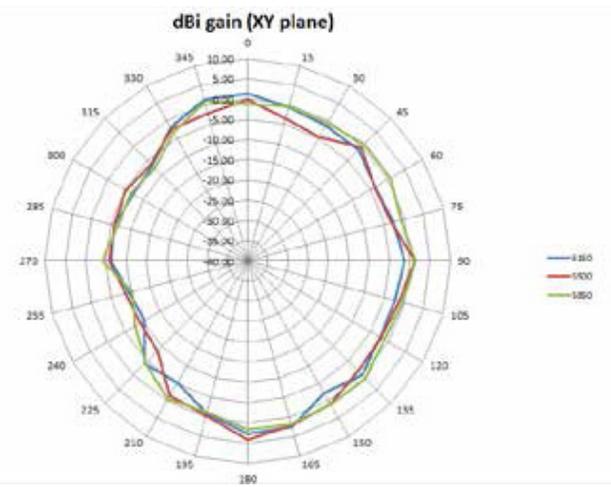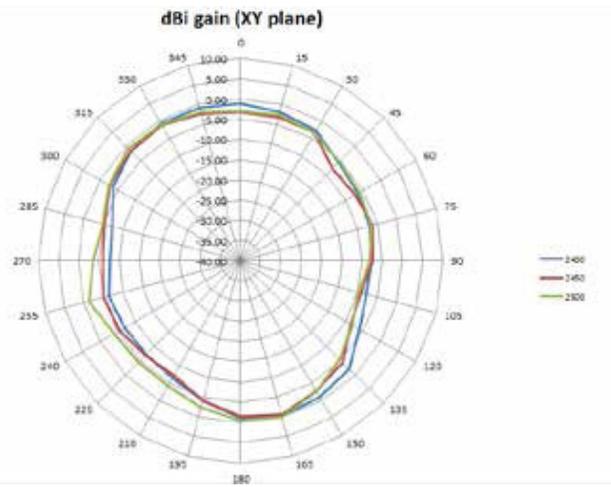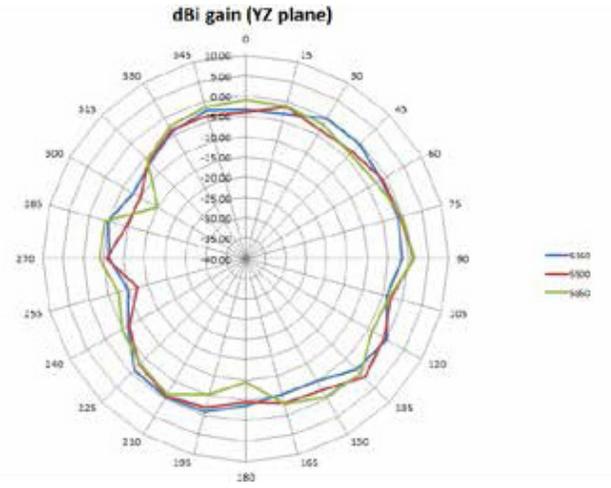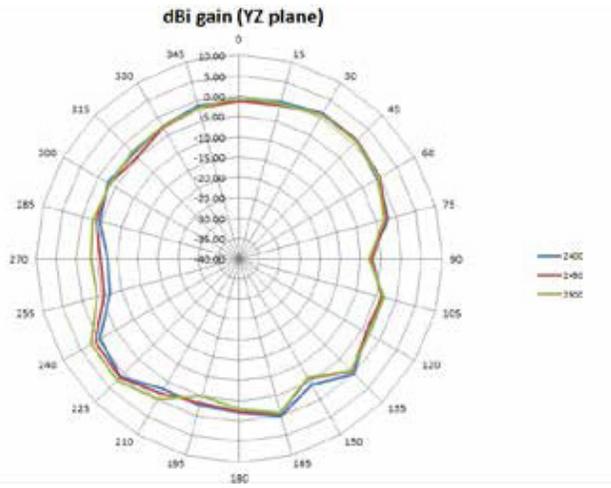

## ECW230 Indoor Access Point

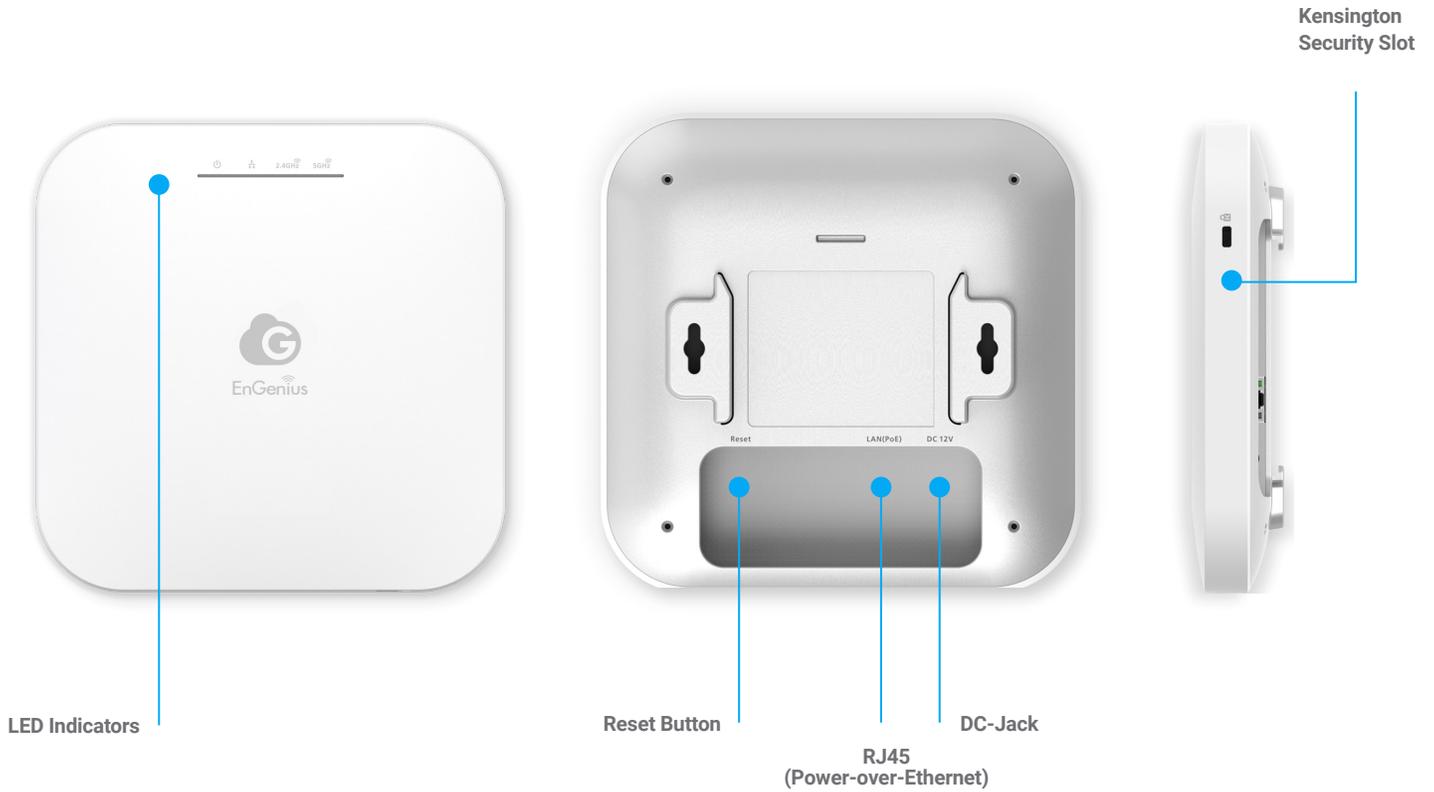

## Plug & Play with Zero Configuration

# Scan & Go

